

REC'D 11 FEB 2005

IB/05/050503

WIPO

PCT

Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04100519.0 ✓

**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk





Anmeldung Nr:  
Application no.: 04100519.0 ✓  
Demande no:

Anmeldetag:  
Date of filing: 11.02.04 ✓  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Lamp with improved lamp behaviour during initiation of the lamp

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H01K9/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI



DESCRIPTION

Lamp with improved lamp behaviour during initiation of the lamp.

The invention relates to a lamp with improved lamp behaviour during initiation of the lamp.

5

Today's lamps, especially HID (high intensity discharge) lamps which are e.g. used in motor vehicles, are designed for optimal performance at the nominal lamp current which is used during usual steady-state performance of the lamp. For 35 W Hg-free automotive lamps this current is typically 0.8 A. However, during run-up of this lamp, where "instant light" needs to be established between the two electrodes of the lamp, a higher, usually quadrupled run-up current is used, which will then be in the range of 3.2 A. This run-up current is in most applications only employed for about ten seconds, after which the very much lower steady state current is employed.

15 However, when employing lamps of the state of the art, there is the danger, that during the initiation of the lamp, when the lamp current is higher than during long-time performance conditions, this will lead to deterioration of the electrodes. This goes especially for those cases where the electrode tips will become so hot that they will start to melt. This may lead to bulb overheating, instabilities and even lamp failure.

20

Therefore it is an object to provide a lamp that has improved lamp behaviour during initiation of the lamp, while still meeting the demands in the field, especially under long-time performance.

25 This object is achieved by a lamp, preferably a Hg-free lamp whereby the lamp comprises electrodes with a cylindrical section and a head section which are adjusted such that in the initial state during run-up of the lamp under 3.2A run-up current the average increase of electrode tip temperature for the first 25 ms after lighting of the lamp is  $\leq 140$  K/ms, preferred  $\leq 135$  K/ms, more preferred  $\leq 130$  K/ms, yet more

preferred  $\leq 125$  K/ms and most preferred  $\leq 120$  K/ms and  $\geq 3$  K/ms. "Lighting" in the sense of the present invention means in particular the initiation of discharge in the lamp. This is usually identical with the switch-on of power supply to the lamp, unless the lamp is lighted with some ignition delay; in this case the lighting would be start after  
5 this ignition delay.

The inventor has studied the problems concerning the initiation behaviour of the lamp, especially the deterioration of the lamp performance and has found out, that the very initial period after lighting of the lamp is decisive. If the electrode rod has a temperature  
10 profile in which the average increase of electrode tip temperature for the first 25 ms after lighting of the lamp is  $\leq 140$  K/ms, preferred  $\leq 135$  K/ms, more preferred  $\leq 130$  K/ms, yet more preferred  $\leq 125$  K/ms and most preferred  $\leq 120$  K/ms, most of the problems occurring with lamps of the state of the art concerning the initiation phase, in which a higher current is applied, can be significantly be reduced, if not totally  
15 overcome. It should be noted, that in the usual run-up phase of a lamp, high initial current in the range of 3.2A is applied to the lamp several seconds. However, the first milliseconds determine the electrode temperature behaviour, especially concerning possible deterioration of the lamp performance during the run-up phase of the lamp.

20 According to a preferred embodiment of the present invention, the lamp comprises an electrode with a cylindrical section and a head section which are adjusted such that in the initial state during run-up of the lamp under 3.2A run-up current the average increase of electrode tip temperature for the first 100 ms after lighting of the lamp is  $\leq 50$  K/ms preferred  $\leq 45$  K/ms, more preferred  $\leq 40$  K/ms, yet more preferred  $\leq 35$  K/ms and most  
25 preferred  $\leq 30$  K/ms and  $\geq 3$  K/ms. By using such an electrode, the above-mentioned problems can be reduced even more significantly.

In order to find out about the preferred designs of a lamp which is capable of meeting the objects of the invention as set out above, the inventors have thoroughly studied,  
30 which design of a lamp is best suited. Amongst other features, the following design principles have found out to be important:

- a) The total volume of the burner chamber must be kept within certain margins, as well as:
- b) the volume of the burner chamber, which surrounds each of the electrodes and
- 5 c) the volume of the burner chamber which is located between the electrodes

Preferably the burner chamber is divided into two essentially semi-ellipsoidal sections, which are referred to as A and B and a third section to be referred to as C. A covers the volume, which extends from one electrode tip along this electrode to the inner wall

10 section of the burner chamber which contains the electrode; B covers the volume, which extends from the other electrode tip along this electrode to the inner wall section which contains the electrode; Section C covers the remaining volume, which is the area between the electrodes. Preferably the sections A and B have essentially the same volume.

15

According to a preferred embodiment of the present invention, the total volume of the burner chamber is  $\geq 15 \text{ mm}^3$  and  $\leq 30 \text{ mm}^3$ , preferably  $\geq 19 \text{ mm}^3$  and  $\leq 25 \text{ mm}^3$  and most preferred  $\geq 21 \text{ mm}^3$  and  $\leq 23 \text{ mm}^3$ .

- 20 According to a preferred embodiment of the present invention, the total volume of at least one of the sections which extends from one electrode tip along this electrode to the inner wall section of the burner chamber which contains the electrode (A;B) is  $\geq 2 \text{ mm}^3$  and  $\leq 3.5 \text{ mm}^3$ , preferably  $\geq 2.4 \text{ mm}^3$  and  $\leq 3.0 \text{ mm}^3$  and most preferred  $\geq 2.5 \text{ mm}^3$  and  $\leq 2.7 \text{ mm}^3$ . Preferably both sections A and B have a volume which is  $\geq 2 \text{ mm}^3$  and  $\leq 3.5$
- 25  $\text{mm}^3$ , preferably  $\geq 2.4 \text{ mm}^3$  and  $\leq 3.0 \text{ mm}^3$  and most preferred  $\geq 2.5 \text{ mm}^3$  and  $\leq 2.7 \text{ mm}^3$ .

According to a preferred embodiment of the present invention, the volume of the burner chamber between the two electrodes (C) is  $\geq 10 \text{ mm}^3$  and  $\leq 25 \text{ mm}^3$ , preferably  $\geq 13 \text{ mm}^3$  and  $\leq 20 \text{ mm}^3$  and most preferred  $\geq 15 \text{ mm}^3$  and  $\leq 18 \text{ mm}^3$ .

30

Furthermore, the inventors have found out that also the length of the electrodes inside the burner chamber (to be referred to by D) plays a role in achieving the objects set above. According to a preferred embodiment of the present invention, the length of the electrodes inside the burner chamber (D) is  $\geq 1.0$  mm and  $\leq 4.0$  mm, more preferably  $\geq$  1.5 mm and  $\leq 3.0$  mm and most preferred  $\geq 1.8$  mm and  $\leq 2.3$  mm.

For further illustration it is referred to Fig. 1, in which the volumes A, B and C and the length D is shown for an insofar preferred embodiment of the present invention.

According to a preferred embodiment of the present invention, the inner pressure of the lamp is  $\geq 6$  bar and  $\leq 12$  bar, preferably  $\geq 8$  bar and  $\leq 10$  bar Xe in "turned-off" state and/or  $\geq 50$  bar and  $\leq 90$  bar, preferably  $\geq 64$  bar and  $\leq 80$  bar in "turned-on" state. The salt pressure in the burning lamp is  $\geq 0.6$  bar and  $\leq 1.4$  bar, preferably  $\geq 0.8$  bar and  $\leq 1.2$  bar and most preferred approx. 1 bar.

A preferred filling of the lamp comprises  $\geq 90 - \leq 360$   $\mu\text{g}$  NaI; and/or  $\geq 60 - \leq 180$   $\mu\text{g}$  ScI<sub>3</sub>; and/or  $\geq 0 - \leq 100$   $\mu\text{g}$  ZnI<sub>2</sub> and/or  $\geq 0 - \leq 12$   $\mu\text{g}$  InI, and/or  $\geq 0 - \leq 12$   $\mu\text{g}$  ThI<sub>4</sub> and/or  $\geq 8 - 10$  bar Xe-gas

It should be noted, that a lamp according to the present invention does not only show a good run-up behaviour but also has excellent characteristics during long-time-performance while a much lower current is employed. Therefore, the design of the lamp has to be chosen in that way, that also the standards for a performance under usual steady-state conditions are met. However, simple rod-type electrodes as are now widely used in the state of the art are not suitable to meet these two requirements mentioned above, especially if the range of current that is covered is rather broad, e.g. varying by a factor of 4 over a range of 2.4A.

Thin rods reach too high temperatures and burn shorter in the run-up phase, leading to subsequent problems such as bulb overheating, instabilities and lamp failure.



Thick rods behave unstable in the long-time performance phase as the cathode wants to go to a spot attachment as a result of too strong conduction cooling. Furthermore the conduction losses during the performance of the lamp are too high to meet the standards in the field. Also, the heat flow to the pinch of the lamp (= conducted power loss) is such that the end temperatures rise too high and cause short lifetimes due to pinch cracking. Moreover, the small feedthrough region especially of today's automotive lamp bears a limitation for the rod thickness, which therefore cannot exceed beyond a certain point.

10

The inventor has spent much time investigating in this regard and found out, that preferably the lamp comprises electrodes with a cylindrical section and a head section, whereby the maximum diameter of the head section is larger than the maximum diameter of the cylindrical section. By using such electrodes, the demands in the field concerning the optimal performance at lower currents, such as 0.8A during the steady-state performance of the lamp can be fulfilled easily.

15

It has been found out, that the characteristics and design of the cylindrical section of the electrodes is in particular important for the long-time performance characteristics of the lamp, whereas the characteristics and design of the head section of the electrodes to be used is in particular important for the run-up behaviour of the lamp. Both the cylindrical section and the head section must be matched and adjusted against each other in order to achieve a lamp with the needed performance characteristics. The dimensions should be chosen, such that

20

25

- a) for the run-up the behaviour of the temperature profile is improved and no deterioration occurs
- b) for the nominal current the anode temperature is about the same or slightly higher than the cathode temperature and
- c) heat conduction and power losses are minimal

30

Therefore, according to a further preferred embodiment of the present invention, the maximum diameter of the cylindrical section is of  $\geq 150\mu\text{m}$  and  $\leq 400\mu\text{m}$ , preferably of  $\geq 200\mu\text{m}$  and  $\leq 350\mu\text{m}$  and most preferred of  $\geq 250\mu\text{m}$  and  $\leq 300\mu\text{m}$ .

5

Furthermore it is preferred that the maximum diameter of the head section is of  $\geq 250\mu\text{m}$  and  $\leq 800\mu\text{m}$ , preferably of  $\geq 350\mu\text{m}$  and  $\leq 600\mu\text{m}$  and most preferred of  $\geq 400\mu\text{m}$  and  $\leq 450\mu\text{m}$ . Electrodes employing these geometrical shapes have already proven themselves in practice.

10

According to a further preferred embodiment of the present invention, the head section has a essentially spherical shape. The sphere diameter is preferably of  $\geq 400\mu\text{m}$  and  $\leq 600\mu\text{m}$ . Alternatively, according to another further preferred embodiment of the present invention, the head section has a essentially cylindrical shape. The preferred  
15 cylinder diameter is of  $\geq 250\mu\text{m}$  and  $\leq 500\mu\text{m}$ , preferably of  $\geq 320\mu\text{m}$  and  $\leq 420\mu\text{m}$  and its length is preferably of  $\geq 400$  and  $\leq 1200\mu\text{m}$ .

According to a further preferred embodiment of the present invention, the maximum diameter of the head section is of  $\geq 20\mu\text{m}$  and  $\leq 250\mu\text{m}$ , preferably of  $\geq 50\mu\text{m}$  and  $\leq 150\mu\text{m}$  larger than the maximum diameter of the cylindrical section. An electrode  
20 employing this feature will become not too bulky while still having the advantages within the present invention.

According to a further preferred embodiment of the present invention, the head section  
25 has a longitudinal length of between  $\geq 150\mu\text{m}$  and  $\leq 1500\mu\text{m}$ , preferably between  $\geq 400\mu\text{m}$  and  $\leq 1200\mu\text{m}$  and most preferred between  $\geq 700\mu\text{m}$  and  $\leq 1000\mu\text{m}$ . By doing so, the head section of the electrode will become not too bulky.

The aforementioned components, as well as the claimed components and the  
30 components to be used in accordance with the invention in the described embodiments,

are not subject to any special exceptions with respect to their size, shape, material selection and technical concept such that the selection criteria known in the pertinent field can be applied without limitations.

5 Additional details, characteristics and advantages of the object of the present invention are disclosed in the subclaims and the following description of the respective figures-- which in an exemplary fashion--show preferred embodiments of the lamp according to the invention.

10 Fig. 1 shows a cross-sectional schematic view through a lamp according to one embodiment of the present invention;

Fig. 2 shows a cross-sectional schematic view through a lamp according to one embodiment of the present invention; and

15

Fig.3 shows a schematic enlarged view of the electrode rod of Fig. 1,

Fig.4 shows a schematic enlarged view of the electrode rod according to a further embodiment of the present invention,

20

Fig.5 shows a schematic enlarged view of the electrode rod according to a further embodiment of the present invention; and

Fig. 1 shows a cross-sectional schematic view through a lamp according to one  
25 embodiment of the present invention. Preferably the burner chamber is divided into two semi-ellipsoidal sections, which are referred to as A and B and a third section to be referred to as C. A covers the volume, which extends from one electrode tip along this electrode to the inner wand section of the burner chamber which contains the electrode; B covers the volume, which extends from the other electrode tip along this electrode to  
30 the inner wand section which contains the electrode; Section C covers the remaining

volume, which is the area between the electrodes. Preferably the sections A and B have essentially the same volume. According to a preferred embodiment of the present invention, the total volume of the burner chamber is  $\geq 15 \text{ mm}^3$  and  $\leq 30 \text{ mm}^3$ , preferably  $\geq 19 \text{ mm}^3$  and  $\leq 25 \text{ mm}^3$  and most preferred  $\geq 21 \text{ mm}^3$  and  $\leq 23 \text{ mm}^3$ . According to a  
5 preferred embodiment of the present invention, the total volume of at least one of the sections which extends from one electrode tip along this electrode to the inner wand section of the burner chamber which contains the electrode (A;B) is  $\geq 2 \text{ mm}^3$  and  $\leq 3.5 \text{ mm}^3$ , preferably  $\geq 2.4 \text{ mm}^3$  and  $\leq 3.0 \text{ mm}^3$  and most preferred  $\geq 2.5 \text{ mm}^3$  and  $\leq 2.7 \text{ mm}^3$ . Preferably both sections A and B have a volume which is  $\geq 2 \text{ mm}^3$  and  $\leq 3.5 \text{ mm}^3$ ,  
10 preferably  $\geq 2.4 \text{ mm}^3$  and  $\leq 3.0 \text{ mm}^3$  and most preferred  $\geq 2.5 \text{ mm}^3$  and  $\leq 2.7 \text{ mm}^3$ . According to a preferred embodiment of the present invention, the volume of the burner chamber between the two electrodes (C) is  $\geq 10 \text{ mm}^3$  and  $\leq 25 \text{ mm}^3$ , preferably  $\geq 13 \text{ mm}^3$  and  $\leq 20 \text{ mm}^3$  and most preferred  $\geq 15 \text{ mm}^3$  and  $\leq 18 \text{ mm}^3$ . Furthermore, the length of the electrodes inside the burner chamber (as indicated by D) preferably is  $\geq 1.0 \text{ mm}$  and  
15  $\leq 4.0 \text{ mm}$ , more preferably  $\geq 1.5 \text{ mm}$  and  $\leq 3.0 \text{ mm}$  and most preferred  $\geq 1.8 \text{ mm}$  and  $\leq 2.3 \text{ mm}$ .

Fig. 2 shows a cross-sectional schematic view through a lamp 1 according to one embodiment of the present invention. The lamp 1 comprises a lamp body 10, a burner  
20 chamber 20 and two electrodes 30, between which a light arc 40 is formed, when the lamp 1 is running. The electrodes 30 comprise a head section 60 and a cylindrical section 50 extending from the head section out of the burner chamber 20. As can be seen out of Fig. 3, the electrode head section 60 may be either essentially spherical or – as can be seen out of Fig. 4 - cylindrically in shape. As can be seen out of Fig. 5, a  
25 further suitable and preferred electrode head 60 may also comprise a cylindrical section connected to a hemispherical end part. This design is in particular advantageous for fixing the arc attachment on the tip.

The electrodes 30 are preferably made by metal injection moulding as a single piece;  
30 however the electrode head section 60 can also be connected to the cylindrical section

50 e.g. by welding or any other suitable method. Also laser-shaping techniques can be applicable.

5 A lamp according to the present invention is being designed for the usage in various applications, amongst them: shop lighting, home lighting, head lamps, accent lighting, spot lighting, theatre lighting, consumer TV applications, fibre-optics applications, car lighting, and projection systems.



CLAIMS

1. Lamp, preferably a Hg-free Lamp, whereby the lamp comprises electrodes (30) with a cylindrical section (50) and a head section (60) which are adjusted such that in the initial state during run-up of the lamp under 3.2 A run-up current the average increase of electrode tip temperature for the first 25 ms after lighting of the lamp is  $\leq 140$  K/ms and  $\geq 3$  K/ms.
- 5 2. Lamp according to claim 1, whereby the lamp comprises an electrode rod (30) with a cylindrical section (50) and a head section (60) which are adjusted such that in the initial state during run-up of the lamp under 3.2 A run-up current the average increase of electrode tip temperature for the first 100 ms after lighting of the lamp is  $\leq 50$  K/ms and  $\geq 3$  K/ms.
- 10 3. Lamp according to Claim 1 or 2, whereby the maximum diameter of the head section (60) is larger than the maximum diameter of the cylindrical section (50).
4. Lamp according to Claim 3, whereby the maximum diameter of the cylindrical section  
15 (50) is between  $\geq 150\mu\text{m}$  and  $\leq 400\mu\text{m}$ , preferably between  $\geq 200\mu\text{m}$  and  $\leq 350\mu\text{m}$  and most preferred between  $\geq 250\mu\text{m}$  and  $\leq 300\mu\text{m}$ .
5. Lamp according to Claims 3 or 4, whereby the maximum diameter of the head section (60) is between  $\geq 250\mu\text{m}$  and  $\leq 800\mu\text{m}$ , preferably between  $\geq 350\mu\text{m}$  and  $\leq 600\mu\text{m}$  and  
20 most preferred between  $\geq 400\mu\text{m}$  and  $\leq 450\mu\text{m}$ .
6. Lamp according to any of the claims 3 to 5, whereby the head section (60) has a essentially spherical shape with preferred diameter of  $\geq 400$  and  $600\mu\text{m}$  or an essentially cylindrical shape with preferred diameter of  $\geq 250\mu\text{m}$  and  $\leq 500\mu\text{m}$ , preferably of  $\geq 320\mu\text{m}$   
25 and  $\leq 420\mu\text{m}$  and a preferred length of  $\geq 400$  and  $\leq 1200\mu\text{m}$ .

7. The lamp according to any of the claims 1 to 6, characterized in that the maximum diameter of the head section (60) is of  $\geq 20 \mu\text{m}$  and  $\leq 250 \mu\text{m}$ , preferably of  $\geq 50 \mu\text{m}$  and  $\leq 150 \mu\text{m}$  larger than the maximum diameter of the cylindrical section (50).

5

8. The lamp according to any of the claims 1 to 7, characterized in that the head section (60) has a longitudinal length of  $\geq 150 \mu\text{m}$  and  $\leq 1500 \mu\text{m}$ , preferably of  $\geq 400 \mu\text{m}$  and  $\leq 1200 \mu\text{m}$ .

10 9. The lamp according to any of the claims 1 to 8, characterized in that the burner chamber is divided into two essentially semi-ellipsoidal sections (A and B) and a third section (C), whereas A covers the volume, which extends from one electrode tip along this electrode to the inner wall section of the burner chamber which contains the electrode; B covers the volume, which extends from the other electrode tip along this  
15 electrode to the inner wall section which contains the electrode and section C covers the remaining volume, which is the area between the electrodes, whereby

- the sections A and B have essentially the same volume; and/or
- the total volume of the burner chamber is  $\geq 15 \text{ mm}^3$  and  $\leq 30 \text{ mm}^3$ , preferably  $\geq 19 \text{ mm}^3$  and  $\leq 25 \text{ mm}^3$  and most preferred  $\geq 21 \text{ mm}^3$  and  $\leq 23 \text{ mm}^3$ , and/or
- the total volume of at least one of the sections which extends from one electrode tip along this electrode to the inner wall section of the burner chamber which contains the electrode (A;B) is  $\geq 2 \text{ mm}^3$  and  $\leq 3.5 \text{ mm}^3$ , preferably  $\geq 2.4 \text{ mm}^3$  and  $\leq 3.0 \text{ mm}^3$  and most preferred  $\geq 2.5 \text{ mm}^3$  and  $\leq 2.7 \text{ mm}^3$ , and/or
- 25 - both sections A and B have a volume which is  $\geq 2 \text{ mm}^3$  and  $\leq 3.5 \text{ mm}^3$ , preferably  $\geq 2.4 \text{ mm}^3$  and  $\leq 3.0 \text{ mm}^3$  and most preferred  $\geq 2.5 \text{ mm}^3$  and  $\leq 2.7 \text{ mm}^3$ ; and/or
- the volume of the burner chamber between the two electrodes (C) is  $\geq 10 \text{ mm}^3$  and  $\leq 25 \text{ mm}^3$ , preferably  $\geq 13 \text{ mm}^3$  and  $\leq 20 \text{ mm}^3$  and most preferred  $\geq 15 \text{ mm}^3$  and  $\leq 18 \text{ mm}^3$ ; and/or



- the length of the electrodes inside the burner chamber (D) preferably is  $\geq 1.0$  mm and  $\leq 4.0$  mm, more preferably  $\geq 1.5$  mm and  $\leq 3.0$  mm and most preferred  $\geq 1.8$  mm and  $\leq 2.3$  mm.
- 5 10. A lamp according to one of the claims 1 to 9, being designed for the usage in one of the following applications:
- shop lighting,
  - home lighting,
  - head lamps
  - 10 - accent lighting,
  - spot lighting,
  - theatre lighting,
  - consumer TV applications,
  - fibre-optics applications,
  - 15 - car lighting, and
  - projection systems.



ABSTRACT

Lamp with improved behaviour during initiation of the lamp

The invention relates to a Lamp, whereby the lamp comprises electrodes for which in the initial state during run-up of the lamp under 3.2 A run-up current the average increase of  
5 electrode tip temperature for the first 25 ms after lighting of the lamp is  $\leq 140$  K/ms and  $\geq 3$  K/ms.

Fig. 2



Fig. 1

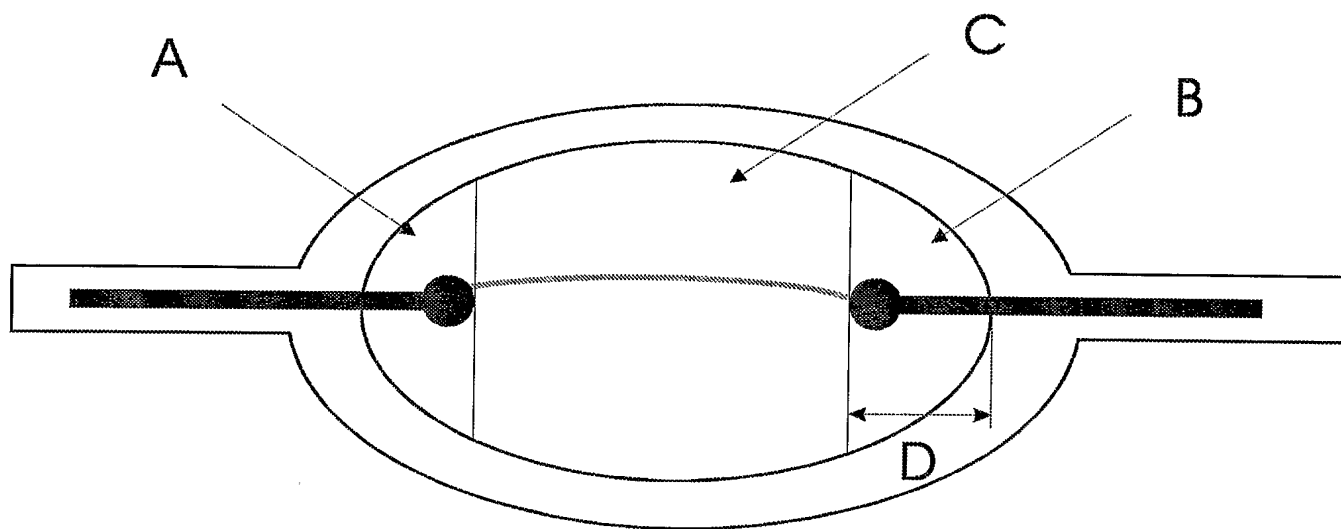


FIG. 2

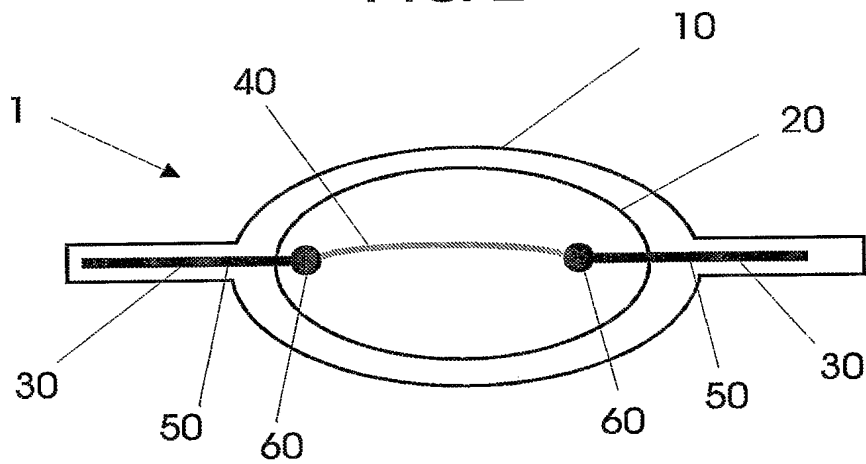


FIG. 3

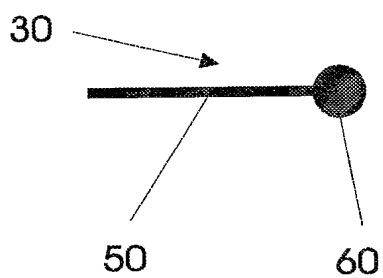


FIG. 4


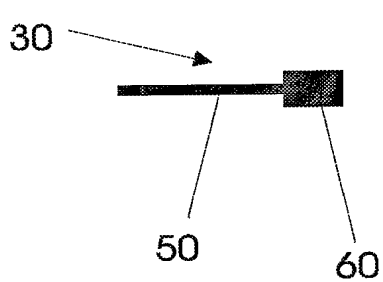


FIG. 5





**PCT/IB2005/050503**

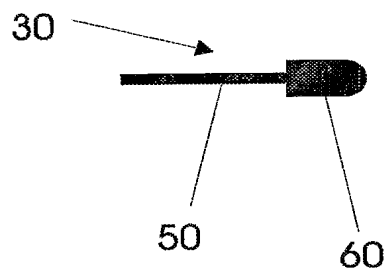